

REAL TIME TRACKERS - INSTRUCTION MANUAL




cloud.friggatech.com


Temperature & Humidity Data Logger



Appearance description

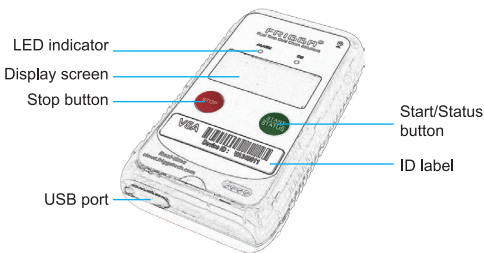

Display description

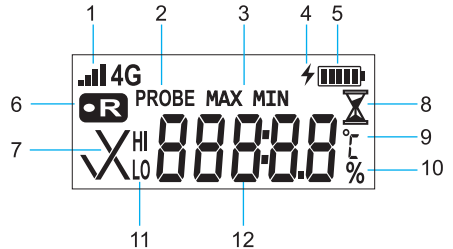


- | | |
|------------------|-----------------------|
| 1. Signal icon | 7. Alarm status |
| 2. Probe mark(*) | 8. Start-up delay |
| 3. MAX & MIN | 9. Temperature unit |
| 4. Charging icon | 10. Humidity unit(*) |
| 5. Battery icon | 11. Alarm type |
| 6. Record icon | 12. Temperature value |

(*) Some models of loggers have this function

1. Check for new logger

V5 series (Single-use logger)

Short press the red "STOP" button, and the screen will display the word "SLEEP", indicating that the logger is currently in sleep state (new logger, not used).

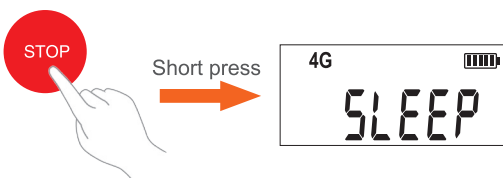


Please confirm whether the battery power is normal. If the battery power is too low, please charge the logger first.

2. Turn on the logger

Long press the green "START" button for more than 5 sec.

When the screen starts flashing the word "StAr-t", please release the button and turn on the logger.

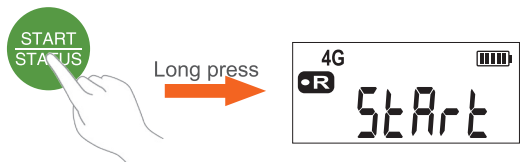


3. Start-up delay

After the logger is turned on, it enters the start-up delay phase.

At this time, the icon "OR" is displayed on the left side of the screen, indicating that the logger has been turned on.


The icon "⌚" is displayed on the right side, indicating that the logger is in the start-up delay phase.

Delay start for 30 minutes.



4. Recording information

After entering the recording state, the "⌚" icon will no longer be displayed, and the alarm status will be displayed in the lower left corner of the screen.




"✓" the temperature is normal.

"X" the threshold has been exceeded.

5. How to stop recording

On the Frigga cloud platform, the logger can be stopped remotely.

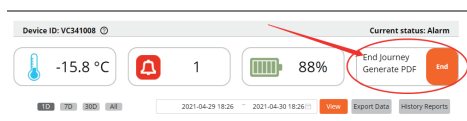


In order to prevent false triggering, the function of stop button is disabled by default. Stop button can be enabled on the Frigga cloud platform.

USB connection to PC or charging, the logger also will stop recording.

6. View final information

After stopping, short press the "STATUS" button to view the local time of the device, the MAX and the MIN temperature data just recorded.

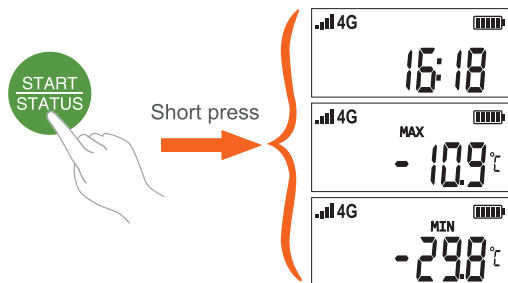

7. Get PDF report

Connect to the computer and get PDF report via the USB port at the bottom of the logger.



PDF data report can also be obtained anytime, anywhere on Frigga cloud platform.



8. Charging

The battery of the V5 can be charged. If the battery is low before use, it can be directly connected to the micro USB interface for charging.

(Please use 5V charger)

When charging, the charging icon "⚡" will be displayed.

