

CLIMASTIQ®

USB TEMPERATURE DATA LOGGER - SINGLE USE

The **#1** Solution to Monitor Your Sensitive Shipments




It Continues Recording After Editing Reports!

ClimaStiq® is a revolutionary datalogger that automatically generates a graphical PDF report and CSV data file each time it connects to a PC.

Save money by monitoring every stage of your transport, every delivery, or your round trips with the same device!

With its ultra-compact format, ClimaStiq® can go along with all your sensitive expeditions at the world's end for more than 6 months!

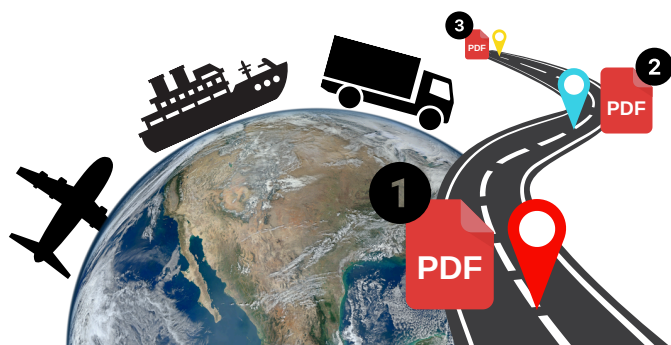

**UP TO 200 DAYS OF
RECORDING***

**ULTRA COMPACT
FORMAT**

- -30°C +70°C
- AutoReport+ Function: Instant Reports Every Time You Log On (PDF+CSV)
- Reports in English or French
- No Special Software Required
- Delivered Configured and Ready to Go
- Reconfigurable Before Start-Up
- Editable Comments Area
- Memory 15,840 Records
- Triple Programmable Alarm With LED Flash (green/red)
- Neutralizable Stop Button
- 18-Months Shelf Life After Purchase
- Adhesive ZIP Re-Sealable Pouch
- Removable Barcode Label With Unique Serial Number
- Calibration Certificate (Paper)
- Certification: CE, EN12830, Rohs
- IATA Air Transport Compliant

*Measurement interval adjustable from 1 min to 24 hours. The maximum recording time of 200 days is achieved with a measurement interval of 19 minutes. Below this, the maximum recording time is reduced proportionally, within the limits of memory capacity.

Compare and Adopt ClimaStiQ®

Standardized Metal Socket

- No connectivity failures. Data preserved.

Printed Circuit Board Direct Contact

- Possibility of short circuits. Risk of data loss.

VS

Haptic Metal Button

- Feeling of pressure and noise. Guaranteed start-up.


Glued Contact Pad

- No feeling of pressure. Risk of non-triggering.

Calibration Certificate		
Configurable Visual Alarms		
Reports Languages	French , English	English, Chinese
100% Reconfigurable (Alarm, Interval, Start-Up Delay, UTC...)*		
Shelf Life	18 Months	12 Months
AutoReport+ (Multiple Reports) Function		
Add Comments (Order Number, Batch, etc.)		
200 Recording Days		

* Reconfigurable before start-up. Free software download from our website.

PDF Report (French or English)

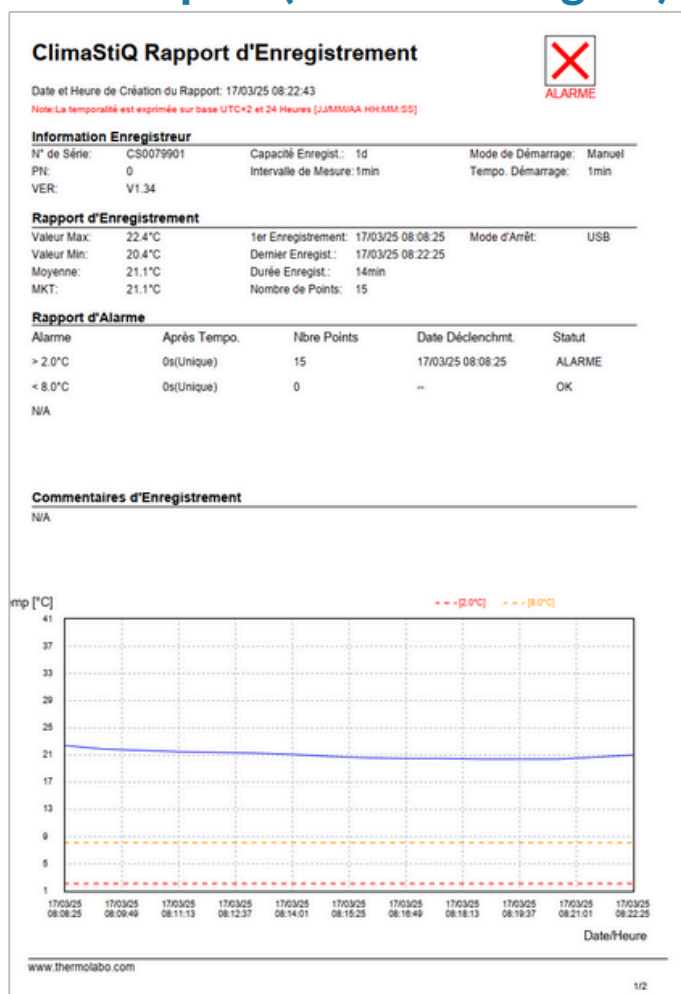

- ## Specifications
- Operating Range: -30°C to +70°C
 - Accuracy : $\pm 0.5^\circ\text{C}$ / $\pm 1.0^\circ\text{C}$ at Extreme
 - Memory Capacity: 15840 Measurements
 - Resolution: 0.1°C
 - Measurement Interval: Standard 10 min - Can be set on order.
 - Recording Duration : 200 days Maximum. Single Use.
 - Start-Up Delay: Standard 30 min Can be set on order.
 - Display: Green and Red flashing LEDs (OK / Alarm)
 - Storage : 18 Months
 - Dimensions: 64 x 21 x 7mm
 - Weight/IP: 10g - IP67 (In Pouch)
 - Battery : 1 Bouton Cell CR2032 3V
 - Minimum System Requirements: USB 2.0, Windows XP, 7, 8, 10. 11. Adobe Reader/PDF or Internet Browser
 - Certification: CE, EN12830, FCC, Rohs

ClimaStiQ® is supplied in a ZIP-lock bag, so that you can quickly and easily return it to its protective bag after reprogramming or editing reports.

A better way to monitor

Thermolabo®
Data logging Services

Since 2015 at your side !

10 YEARS

171 Rue du Haut Planil
 69440 Saint Laurent d'Agny
 France
 +33(0)4.82.53.59.45
 contact@thermolabo.com
 www.thermolabo.com

Our Solutions

- Temp & RH Dataloggers
- Thermal Covers
- Shock Indicators
- Tilt Indicators
- Real Time Monitoring